

ARGUS® 300

UNIVERSAL BROADBAND TESTER

GPON

FTTH

XGS-PON

xPON-ID

PON Installation

Sel. OPM

OFF

OTDR

FIT

OLTS

VFL

G.fast

VDSL

ADSL

SHDSL

Bonding

2.5GigE

10GigE

SFP

WLAN

Data
101101011011

POTS

IP TV

ISDN

Vo IP

Cu

Speed test

TDR

iperf

RFL

RFC 6349

Remote kit

RFC 2544

Line Scope

Y.1564




Data sheet: Technical data subject to change without notice

TEST EQUIPMENT
MADE IN GERMANY

intec

GESELLSCHAFT FÜR
INFORMATIONSTECHNIK mbH

Where to use the ARGUS?

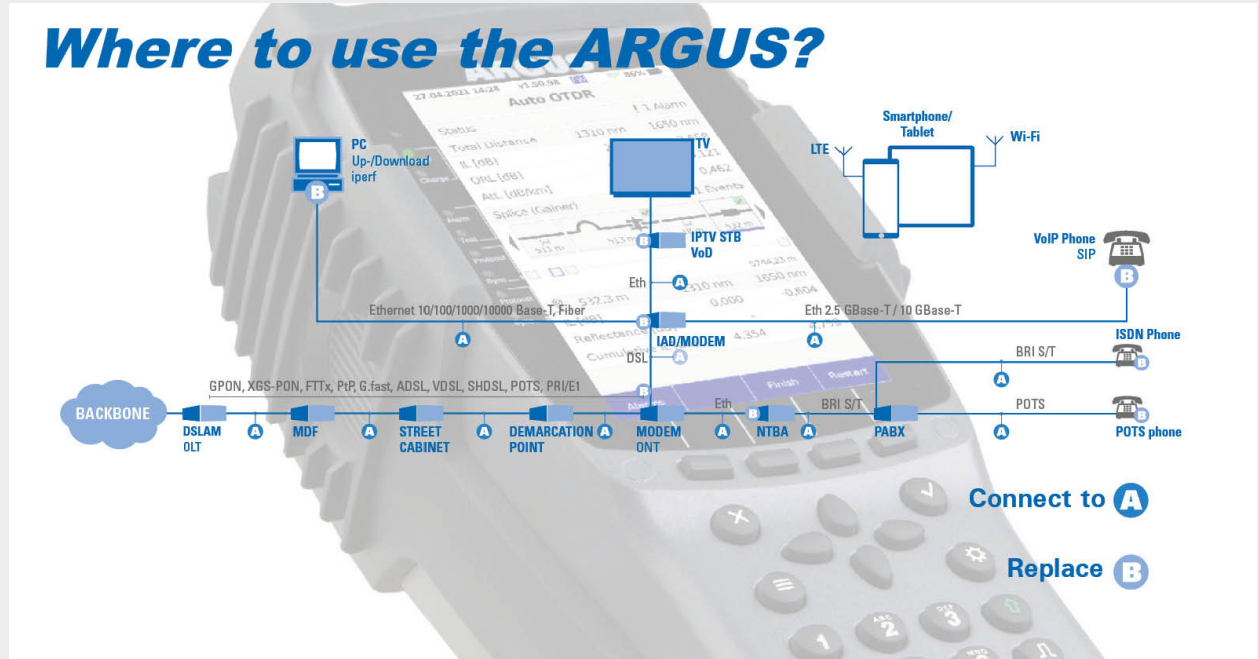

ARGUS[®] 300: the universal broadband tester

The new ARGUS[®] 300 all-in-one tester delivers improved performance for testing broadband interfaces. The high-Quality multifunction tester is ideally equipped for the Expansion of future networks.

Modern design and new housing concept

Its robust design combines the requirements for a compact hand-held meter in daily field use with the performance of a high-end tester. The ARGUS[®] tester with touch-screen display enables intuitive navigation of the familiar ARGUS[®] menu structure. Thanks to the use of numerous graphical elements, the redesigned GUI makes this sophisticated multifunction tester as easy to use as a smartphone. A new, innovative internal help function supports rapid, reliable interpretation of test results.

All necessary broadband interfaces

The ARGUS[®] 300 reliably tests all broadband interfaces, from GPON, XGS-PON and G.fast (106 + 212 MHz) to super Vectoring, bonding, ADSL, VDSL and SHDSL accesses, in the uncompromising quality you have come to expect. It is also equipped with a wide range of further interfaces and test functions, such as 2.5 GB Ethernet, WLAN, Copper, TDR, RFL, triple Play and many more. An extremely high-performance hardware is planned specifically for tests in the Gigabit Ethernet range (up to 10 GgE).

Additional features

The integrated WIFI interface enables the ARGUS[®] 300 to communicate with its environment directly – a PC link is no longer required.

Once integrated in your job management system, the ARGUS[®] 300 marks the advent of a new generation of broadband testing.

intec Gesellschaft für Informationstechnik mbH







For over 35 years, intec Gesellschaft für Informationstechnik mbH has stood for innovative measurement technology - developed and produced for telecommunications networks in Europe. Our ARGUS[®] testers make fiber optic and broadband infrastructures accessible, document efficiently and support daily maintenance and troubleshooting in fiber optic and copper networks as well as via Ethernet. We deliver what network operators and service technicians need: speed, security and trust.

Our solutions are optimally adapted to European standards, norms and protocols. Linguistic and technical localization, fast shipping within the EU and direct technician support guarantee short distances and fast help without detours. For us, "Made in Europe" stands for quality, transparency and sustainability. Thanks to modular, scalable products, we serve both small companies and large network operators. Long-term product maintenance and regular updates make your investment future-proof.

We are driven by our innovation: We integrate the latest technologies such as GPON, XGS-PON, ADSL2+, VDSL2 vectoring, VDSL2 bonding, VDSL2 profile 35b or G.fast (profile 106a and 212a) and are constantly developing our portfolio. This means that ARGUS[®] testers are ideally equipped for current and future requirements. Our user interface is based on freely configurable tiles: technicians start directly with the appropriate measurement configuration - simple, fast and error-free. Clearly displayed results are transmitted via WLAN to smartphones, central servers or the ARGUS[®] app. Supervisors can also take over devices remotely and provide active support. Central management and archiving of test results make it easier to handle large network structures - significantly reducing training costs and error rates.

Our ARGUS[®] testers have been sold over 100,000 times - including to leading European network operators such as Deutsche Telekom, Vodafone, Telefónica, KPN, BT and Telekom Austria.

Specification Broadband Interfaces:

General:		Application, Settings + Results:		
<p>G.fast Tester </p> <p>G.fast Modem Simulation, FTU-R, CPE G.fast Bridge + G.fast Router ITU-T G. 9700/9701 Profile 106a/212a Time Division Duplexing (TDD)</p>	<p>VDSL Tester </p> <p>VDSL2 Modem Simulation, VTU-R, CPE VDSL2 Bridge + VDSL2 Router ITU-T G.993.2 (Profiles 8, 12, 17a, 30a) ITU-T G.993.2 Annex Q (Profile 35b), Super Vectoring (Vplus) ITU-T G.993.5, G.vector (Vectoring) ITU-T G.998.4, G.INP (Retransmission) ITU-T G.998.2, G.bond, 35b Bonding</p>	<p>ADSL Tester </p> <p>ADSL Modem Simulation, ATU-R, CPE ADSL Bridge + ADSL Router ITU-T G.992.1, Annex A+B (ADSL) ITU-T G.992.2, Annex A (G.lite) ITU-T G.992.3, Annex A+B+L+M (ADSL2) ITU-T G.992.5, Annex A+B+J+M (ADSL2+)</p>	<p>G.fast / VDSL / ADSL</p> <ul style="list-style-type: none"> • Net Data Rate d/u [kBit/s] • Attainable Data Rate d/u [kBit/s] • Relative Capacity d/u [%] • SNR Margin/Loop Attenuation d/u [dB] • Output Power d/u [dBm] • Interleave Delay d/u [ms] • Impulse Noise Protection d/u [Symbols] • FEC + CRC, far/near [Errors] • ES, SES, LOSS + UAS, far/near [sec] • Reset / Resync [Number] • Bitswap Events d/u • Retransmission d/u (G.INP) • Vendor, far/near [Name/Number] • Modem Trace • Bits/SNR/QLN/Hlog/Noise Graphs • OK/Fail Evaluation: Bitrate, CRC, FEC • DC Voltage, UDC 	<p>G.fast / VDSL</p> <ul style="list-style-type: none"> • Signal Attenuation [dB] • Showtime No Sync [Number] • Seamless Rate Adaption (SRA) • Data Transmission Unit (DTU) • INP REIN + INP SHINE [Symbols] • Expected Throughput Rate (ETR) [kBit/s] • Electrical Length @1 MHz [dB] • EFM Statistics: Frames + Bytes • Graphical Long-time Trace In ARGUS[®] <p>VDSL</p> <ul style="list-style-type: none"> • Vectoring Mode • Graphical Long-time Trace In ARGUS[®] <p>ADSL</p> <ul style="list-style-type: none"> • Latency Mode • Graphical Long-time Trace In ARGUS[®]
<p>SHDSL Tester </p> <p>SHDSL Bridge + SHDSL Router SHDSL DSLAM Simulation, STU-C ITU-T G.991.2, Annex A+B+F+G (G.SHDSL) ETSI TS 101 524 V 1.2.1 (ETSI SHDSL) ETSI TS 101 524 V 1.2.2 (E.SHDSL.bis) ITU-T G.994.1 (G.hs) SHDSL 2, 4 and 8 Wire</p>	<p>GigE Tester </p> <p>Ethernet According to IEEE 802.3 LAN1/LAN2/LAN3: RJ45 interface (8P8C) • 10/100/1000 Base-T • LAN1 additionally with 2.5 GBase-T (2.5GbE), 2500 BASE-T (IEEE 802.3bz, NBase-T) • LAN2 additionally with 5/10 GBASE-T (5/10 GbE), 5000/10000 BASE-T, (MGBASE-T) (IEEE 802.3ak, IEEE 802.3an) SFP1: full SFP interface (FTTx, PtP) • 1000 Base-BX/LX/SX/ZX Active Ethernet (IEEE 802.3 Clause 38 / 802.3z) • 2.5 GBase-X (2.5GigE/2.5GbE) SFP2: full SFP+ interface (FTTx, PtP) • 10 GBASE-X (10GbE/10GE), 10000 BASE-X (IEEE 802.3ae)</p>	<ul style="list-style-type: none"> • TC Sublayer: ATM, TDM, HDLC, EFM (IEEE 802.3.ah) • Independent TC (ITC) • Line Probing (PMMS) • Data Rate/Line [kBit/s] • Resync/Line [Number] • Used Wire Pair/Line • SNR Margin/Line [dB] • SNR/Line + Attenuation/Line [dB] 	<ul style="list-style-type: none"> • Output Power/Line [dBm] • CRC/Line, far/near [Errors] • LOSWS, ES, SES, US • Display of EFM States/Line • Graphic Long-time Trace In ARGUS • EFM Statistics: Frames + Bytes • ATM Statistics: OAM Cells, User VCCs, AAL5 PDUs, unmapped cells • Parameters/Segment (for SRU) 	
<p>GigE Tester </p> <p>Ethernet According to IEEE 802.3 LAN1/LAN2/LAN3: RJ45 interface (8P8C) • 10/100/1000 Base-T • LAN1 additionally with 2.5 GBase-T (2.5GbE), 2500 BASE-T (IEEE 802.3bz, NBase-T) • LAN2 additionally with 5/10 GBASE-T (5/10 GbE), 5000/10000 BASE-T, (MGBASE-T) (IEEE 802.3ak, IEEE 802.3an) SFP1: full SFP interface (FTTx, PtP) • 1000 Base-BX/LX/SX/ZX Active Ethernet (IEEE 802.3 Clause 38 / 802.3z) • 2.5 GBase-X (2.5GigE/2.5GbE) SFP2: full SFP+ interface (FTTx, PtP) • 10 GBASE-X (10GbE/10GE), 10000 BASE-X (IEEE 802.3ae)</p>	<ul style="list-style-type: none"> • Link Status / Autonegotiation, far/near • Auto-MDI(X) Function • Speed (10, 100, 1000, 10000 Mbit/s) • Duplex Mode (full, half)/Flow Control • Polarity/Wire Pair (+/-) • Pair skew/Wire Pair [ns] • Frames (Rx/Tx) [Number] • Errors, Bytes (Rx/Tx) [Number] • Collisions [Number] 	<ul style="list-style-type: none"> • SFP: Digital Diagnostic Mode (DDM): - DDM According to SFF-8472 - Manufacturer Name, OUI, Item Number, Revision, Serial Number, Date, Coding, Medium, Speed - Optical Level (Tx/Rx), ±3 dB - Optical, PWR (Tx/Rx), ±3 dB - Temperature, Voltage, Current (Tx) - Max. Cable Length (Cu, SM, MM/OM1-4) 		

Data sheet: Technical data subject to change without notice

General:		Application, Settings + Results:	
GPON tester 	GPON Modem Simulation, ONT, CPE ITU-T G.984 via ARGUS® GPON ONT <ul style="list-style-type: none"> GigaBit Passive Optical Network DDM According to SFF-8472 (see Ethernet) GPON Bridge/Router* 	<ul style="list-style-type: none"> Link Status / Link Speed ONT Status / OLT Tx Power Optical Network Unit ID (ONU ID) Passive Optical Network ID (PON ID, Vendor + Equipment ID / Version) 	<ul style="list-style-type: none"> GPON Modem Trace Serial Number / Password Configurable Scan PLOAM message (ONU ID, S/N)* SFP: Digital Diagnostic Mode (DDM) Measuring range at 1490 nm: -8 to -30 dBm Accuracy at -20 dBm: ±0.5 dB, calibrated Optical Line Attenuation
XGS-PON tester	XGS-PON Modem Simulation, ONT, CPE ITU-T G.9807.1 via ARGUS® XGPON ONT <ul style="list-style-type: none"> GigaBit Passive Optical Network XGS-PON Bridge/Router* 	<ul style="list-style-type: none"> Link Status ONT Status / OLT Tx Power Optical Network Unit ID (ONU ID) Passive Optical Network ID (PON ID, Vendor + Equipment ID / Version) 	<ul style="list-style-type: none"> XGS-PON Modem Trace Serial Number / Password Configurable Scan PLOAM message (ONU ID, S/N)* SFP: Digital Diagnostic Mode (DDM) Measuring range at 1577 nm: -7 to -34 dBm Accuracy -20 dBm: ±0,5 dB, calibrated Optical Line Attenuation
PON installation test	GPON installation test PON level check	<ul style="list-style-type: none"> guided measurement sequence target attenuation can be entered as threshold value automatic OK /Fail evaluation PDF measurement protocol SFP parameters (s. Eth/GPON) 	<ul style="list-style-type: none"> calibrated measurement of the insertion loss with ±0.5 dB accuracy Assistance for up to 64 fibers Evaluation PON-ID Query of the job data etc.
WLAN 	WLAN Access Point Mode WLAN Client Mode <ul style="list-style-type: none"> via int. opt. interface <ul style="list-style-type: none"> Tri-Band (2.4; 5 and 6 GHz), 2x2 WiFi7 (IEEE802.11 a/b/g/n/ac/ax/be) via ext. USB stick, max. <ul style="list-style-type: none"> Dual-Band (2.4 and 5 GHz), 2x2 WiFi5 (IEEE802.11 a/b/g/n/ac) WiFi6e (IEEE802.11 a/b/g/n/ac/ax) WiFi6/7 detection (IEEE802.11 ax/be) WPA2/WPA3 Personal/Enterprise, OWE 	<ul style="list-style-type: none"> WLAN Access Point Scan <ul style="list-style-type: none"> Number / List Access Points Number 2.4 GHz / 5 GHz Networks Network/Name (SSID) Signal Strength (RSSI) [dBm] Signal Quality [%] MAC Address of AP Used Channel/Frequency Used Protocol Negotiated Encryption Authentication Group Cipher, Pairwise Cipher 	<ul style="list-style-type: none"> Access Point Mode (WLAN Router) for mobile devices IP Tests (Data, VoIP, IPTV) AP Management (save etc.) Test Result Upload via Web Server, WebDAV and FTP Configuration Download via WebDAV and FTP Remote Control via VNC, Web Server Firmware Update via FTP Download
ARGUS® WLAN Analyzer	<ul style="list-style-type: none"> Displaying the networks during existing WLAN connection Manual evaluation of channels possible in tabular and graphical form 	<ul style="list-style-type: none"> Searching for networks again during existing WLAN connection 	<ul style="list-style-type: none"> Advanced automated evaluation of found networks and display of all AP info
WLAN spectrum analysis	<ul style="list-style-type: none"> optional: ARGUS® 2G4 Scope graphical WLAN spectrum analysis for 2.4 GHz for the specific WLAN troubleshooting 	<ul style="list-style-type: none"> Real-time Analysis /Graphics passive (no WLAN Interference) Channel Load Graphical representation 	<ul style="list-style-type: none"> Detection of <ul style="list-style-type: none"> Bluetooth Devices Motion Sensors Microwave Ovens Baby Phones

Data sheet: Technical data subject to change without notice

Specifications Protocol and IP tests (Triple Play):

General:	Applications, Settings + Results:	
Protocol Tests	<ul style="list-style-type: none"> Configurable MAC Address Use of Virtual Lines (VL): Maximum Flexibility as well as Control and Priorization under Real Conditions by Several VLs simultaneously One VL/Service each (Data, VoIP, IPTV, opt.) VL Configurable in Profiles (20) <ul style="list-style-type: none"> IP, PPPoE via xDSL, G.fast + Eth (PPTP) EoA, IPoA, PPPoA via ADSL VPI/VCI, VLAN (Modus, ID, Prio., TPID) PPP Profiles (Username, Password) IP Version (IPv4, IPv6, Dual) + DHCP Automatic receiving of connection-dependent dial-in data: PPP, VoIP (phone number) 	<ul style="list-style-type: none"> Display of BRAS Information <ul style="list-style-type: none"> AC Name, Service Name, Session ID Display of PPP Information <ul style="list-style-type: none"> PPP Packets/Bytes (Tx/Rx) PPP Trace (PPP Commands, Time) Display of IP Information <ul style="list-style-type: none"> IPv6: Global Unicast/Link Local Address IPv4: Assigned IP, Gateway, DNS Recording of a Data Log for Evaluation on PC (e. g. Wireshark)
Data Tests (Download Tester) PC/Terminal Simulation IP Ping Test Traceroute Test HTTP Up-/Download Test FTP Up-/Download Test FTP Server Test Webbrowser ARGUS® Real Speed Formal (RFC6349) ARGUS® Real Speed Direct (iperf)	<ul style="list-style-type: none"> Memory with up to 10 IP Addresses, (IPv4/6 Address as Number or Name) Number of Pings, Pause Configurable (Ping), Packet Size + Fragmentation Configurable Traceroute: Max. Hops, Probes + Timeout Conf. Down-/Upload: Server Profiles (10): Server Addr., File Name/Size, Number, Number of Parallel Downloads Configurable <ul style="list-style-type: none"> FTP: Username + Password Display Results IP Ping <ul style="list-style-type: none"> Display of Packets (Tx/Rx/repeated) Checksum Error [Number] Error Packets [Number] Display Results Traceroute <ul style="list-style-type: none"> Current Hop + Probe / List of Hops Response Time of Hops [s] IP Address of Current Hops 	<ul style="list-style-type: none"> Round Trip Time (min/max/avg) [ms] Display Results Down-/Upload <ul style="list-style-type: none"> Current/Total Number [Number] Already Loaded Data [%] Average Speed [Mbit/s] Loaded Bytes [MB] Transfer Time/Remaining Time [h:min:s] ARGUS® Real Speed Direct (iperf) <ul style="list-style-type: none"> Speedtests up to 10 Gbit/s, depending on utilization (min. 1 Gbit/s guaranteed) Client /Server Mode TCP Throughput Down- /Upload ARGUS® against ARGUS® ARGUS® Real Speed Formal (RFC6349) <ul style="list-style-type: none"> Throughput Test Evaluation TCP Throughput according to RFC 6349
VoIP Tests (VoIP Tester) IP Telephone Simulation Testing of VoIP Connections incl. Acoustics (dif. Codecs) MOS Evaluation (ITU-T P.800) Call Generator (up to 30 Calls)	<ul style="list-style-type: none"> Configuration in VoIP Profiles (20): SIP Username, Password, Registrar Server, Outbound Proxy/SBC, Domain, Listen + Remote Port, Authentication, Caller ID, User Agent, Qualify, Process of Registration Phone Settings: RTP Port Area, Silence Detection, Jitterbuffer, Codecs, DTMF STUN Server MOS Threshold for OK/Fail Evaluation VoIP QoS, Layer 3 Diffserv: RTP/SIP: ToS, DSCP VoIP QoS, Layer 2 VLAN Prio.: RTP/SIP: VLAN Prio. Codecs: G.711 (a-law/μ-law), G.722 Display of Own Number, Number of Called Person 	<ul style="list-style-type: none"> Duration of Connection [h:min:s] MOS Plain Text Evaluation, According to E Model R Factor, ITU-T G. 107 (current/avg), MOS (current/avg/min/max/ideal) Statistics: RTP Packets (Tx/Rx), Error Counter: RTP Drop, RTP Error RTP Jitter Rx (current/avg/min/max) Lost RTP Packages (avg/min/max) RTCP Contents: <ul style="list-style-type: none"> RTP Jitter far (current/avg/min/max) [ms] Lost RTP Packets of Remote Side Network Delay (current/avg/min/max) [ms] Display of Registration Details: SIP Codes, Registrar IP, Proxy, URI Simulation (VoIP NT)
IPTV Tests (IPTV Tester) IPTV Device Simulation IPTV STB Simulation (Set-top Box) OK/Fail Evaluation IPTV Channel Scan IPTV Monitor (IPTV passive)	<ul style="list-style-type: none"> Configuration in IPTV Profiles (up to 3): Editable Channel List (up to 250 Channels) Multicast IP + Port, Channel Name, IGMP version Threshold for IPTV OK/Fail Evaluation: IGMP Latency, Sync Error, PCR Jitter, Error Indication, CC Errors, CC Error Rate, Audio + Video Bytes, RTP Jitter, RTP Sequence Error, Current + Total RTP Loss Rate Different VLs for IGMP + RTP Scan Profiles (3) Configurable: max. Zapping Time Display of Selected IPTV Channel, Test Duration, current Bitrate, OK or Fail Evaluation Packets Loss (current/min/max/avg) [Number] 	<ul style="list-style-type: none"> RTP/UDP Packet Loss Rate [%] Delay [ms] + Delay Factor [ms] Media Loss Rate (MLR) [%] IP Address of Channel + Port IGMP Latency (Activation Time) [ms] For Correlation: xDSL CRC Counters RTP Errors, RTP Sequence Errors MPEG Bitrate + Packets (min/max/ ...), Bytes (current/min/max/avg/Sum), PCR Jitter (current/min/max/avg) [ms], CC Errors + Error Rate (current/max) [%], Error Sync + Indication Codecs and PIDs (Packet Identifier) Channel Zapping Time (min/max/avg) [ms]

Data sheet: Technical data subject to change without notice

Specifications Fiber Tests:

General:	Applications, Settings + Results:	
OTDR Optical Time Domain Reflectometry	<ul style="list-style-type: none"> for troubleshooting on optical lines Acceptance measurement and route analysis Smart Auto, Expert or Real Time Mode (up to 4 Hz) Wavelengths: 1310 and 1650 nm (± 20nm) or 1310 and 1550 nm (± 20nm) Dynamic range: 20 dB at 100 ns; 37 dB at 1310 nm, 20 μs; 36 dB at 1550 nm, 20 μs; 35 dB at 1650 nm, 20 μs Event dead zone: 0.9 m Attenuation dead zone: 3.5 m 	<ul style="list-style-type: none"> PON dead zone: ≤ 25 m; typical 20 m Pulse width: 3, 5, 10, 20, 30, 50, 100, 200, 300, 500 ns; 1, 2, 3, 5, 10, 20 μs Range settings: 250, 500 m; 1, 2, 5, 10, 15, 20, 40, 80, 160, 240 km* Measuring points: up to 300.000 points Resolution: 5 cm to 32 m Distance Accuracy: $\pm (1 \text{ m} + 0.003 \% * \text{distance} + \text{resolution})$ Linearity: ± 0.05 dB/dB <p>* Max. range depends on fiber type (attenuation/km)</p>
ARGUS OPM Optical Power Meter	<ul style="list-style-type: none"> Powerful Optical Power Meter in SFP form factor Powerful InGaAs Photo Diode Optical Level Measurement with wavelengths from 850, 1300, 1310, 1490, 1550, 1610, 1650 nm Measuring range: -60 dBm up to +6 dBm, ± 0.25 dB Live display of the level 	<ul style="list-style-type: none"> Storage of the measurement in measurement protocols Robust and protected by use in SFP slot Optional Calibration at 1310, 1490 & 1550 nm (-20 dBm), 20 °C Remote control of the OLS with switching of the wavelengths and transmission of the transmission power via TWIN mode (only in conjunction with OLS)
Selective xPON-OPM for GPON / XGS-PON 3xOPM	<ul style="list-style-type: none"> Measuring range: <ul style="list-style-type: none"> 1577 & 1490 nm (filtered): from -40 to +6 dBm (max. power +18 dBm) 1270, 1300, 1310, 1550, 1610, 1625 nm (broadband): from -50 to +13 dBm (max. power +18 dBm) Accuracy: $\pm 0,5$ dB Calibration conditions: -20 dBm, 23°C ± 5 K Readout of PON ID and XGS-PON ID* via SC/APC, detection up to: <ul style="list-style-type: none"> GPON ≥ -29 dBm XGS-PON ≥ -30 dBm 	<ul style="list-style-type: none"> Connector: SC/APC, SFP+, LAN4 10 GBase-T Full ONT simulation (GPON ONT or XGS-PON ONT) via additional GPON/XGS-PON SFP transceiver module IP/Performance tests via SFP+, LAN4 10/5/2.5/1 GBase-T, 100Base-Tx with up to 1 Gbit/s (max. 2.5 Gbit/s) Remote control of the OLS with switching of the wavelengths and transmission of the transmission power via TWIN mode (only in conjunction with OLS) <p>* The network must provide the ID for this.</p>
Selective Through Mode xPON-OPM for GPON/ XGS-PON 4x OPM opt. 5xOPM	<ul style="list-style-type: none"> Measuring range: <ul style="list-style-type: none"> Downstream (OLT socket): -1577 & 1490 nm (filtered): from -40 to +9 dBm (max. power +18 dBm) Upstream (ONT socket): -1310 & 1270 nm (filtered): from -35 to +10 dBm (max. power +18 dBm) opt. 1550 nm (filtered): from -40 to +16 dBm Accuracy: filtered ± 0.5 dB Insertion loss: 1.5 dB Alien ONT detection (burst + permanent) 	<ul style="list-style-type: none"> Calibration conditions: -20 dBm, 23°C ± 5 K Connector: 2x SC/APC (ONT + OLT), SFP+, LAN 10 GBase-T Full ONT simulation (GPON ONT or XGS-PON ONT) via additional GPON/XGS-PON SFP transceiver module Readout of PON ID and XGS-PON ID* via SC/APC, detection up to: <ul style="list-style-type: none"> GPON ≥ -30 dBm XGS-PON ≥ -29 dBm IP/Performance tests via SFP+, LAN 10/5/2.5/1 GBase-T, 100Base-Tx with up to 10 Gbit/s (opt.) <p>* The network must provide the ID for this.</p>
Optical Fault Finder	<ul style="list-style-type: none"> simple fault finder detects different types of optical faults up to 15 events with one test 	<ul style="list-style-type: none"> distance to every event robust and protected by use in SFP slot quick and easy to use

Data sheet: Technical data subject to change without notice

External extensions:

General:	Applications, Settings + Results:	
Fiber Inspection Tool Video Microscope	<ul style="list-style-type: none"> • USB Microscope for the ARGUS • optical Fiber Inspection • manual Focusing with separate key • optional: Autofocus • digital Zoom • Pass /Fail evaluation according to IEC 61300-3-35 	<ul style="list-style-type: none"> • min. Particle Size 0.5 µm • Defects: Core, Cladding, Adhesive, Contact • Scratches: Core, Cladding, Adhesive, Contact • different Tips /Adapters included in scope of delivery • PC, UPC, APC • Single Mode /Multi Mode
VFL Visual Fault Locator	<ul style="list-style-type: none"> • Mini Visual Laser Source • Output Power: 1 mW • Detecting Range: about 5 km • Wavelength: 650 nm 	<ul style="list-style-type: none"> • Laser Level: Class 2 • Connector: Un/FC • Modulation Frequency: CW / 2 Hz • Power Supply: 2 * AAA batteries
Optical Light Source	<ul style="list-style-type: none"> • Wavelength: 1310, 1490, 1550 & 1625 nm (± 20 nm) • Stability: <ul style="list-style-type: none"> - Short term (15 minutes): 1310 nm < ±0,05 dB 1490 nm < ±0,10 dB 1550 nm < ±0,05 dB 1625 nm < ±0,10 dB - Long term (5 hours): 1310 nm < ±0,10 dB 1490 nm < ±0,20 dB 1550 nm < ±0,10 dB 1625 nm < ±0,20 dB • Connector: SC/APC with protection against dust & loss • Spectral width: 5 nm • Frequency: 270 Hz, 1 KHz, 2 KHz 	<ul style="list-style-type: none"> • Auto wavelength: protocol-based wavelength and TX power transmission • Power: -5 dBm ±0.5 dB • Auto power off / backlight • Power supply: 2x Ni-MH AA (2500 mAh), AC/DC charger • Dimension (L x W x H): 160 x 76 x 45 mm • Net weight: 270 g • Accessories: AC/DC charger, 2x AA battery • Remote control of the OLS with switching of the wavelengths and transmission of the transmission power via TWIN mode (only in conjunction with ARGUS OPM) • ARGUS can be enhanced with an Optical Loss Test Set (separate option)

Data sheet: Technical data subject to change without notice

Specifications Ethernet Tests:

General:	Applications, Settings + Results:	
10 GigE Loop	<ul style="list-style-type: none"> Layer Configurable (L1 to L3): MAC Modus (own MAC or all), VLAN Mode + ID, Prio., TPID Configurable, IP Mode and own IP Address 	<ul style="list-style-type: none"> Duration of Loop, Throughput [Mbit/s], MAC Address Looped Packets, Looped Packets/Second [Number]
GigE Traffic Generator Package Generator	<ul style="list-style-type: none"> Layer Configurable (L1 to L3): L2: MAC, VLAN Mode + ID, Prio., TPID L3: IP Mode, Address, Gateway, Net Mask Bandwidth, Endless Mode, Frame Size, Follow-Up Time, Time to Live (TTL) - Maximum Data Rate : up to 10 Gbit/s 	<ul style="list-style-type: none"> Display of Data Rate, Line Rate + Frame Rate (avg) (Tx/Rx) Frame (OK/Break/Errors) (Tx/Rx) Frame Errors (Rx): Eth FCS, MAC Not OK/External, Payload Duration of Traffic Generator - Frame (Tx/Rx), Frame Losses [%]
RFC2544 Test Throughput Test Latency Test Frame Loss Test	<ul style="list-style-type: none"> Config. Profiles (20): Netto Frame Size Configurable - IPv4: 64 up to 1596 Byte (1 Port: 10232) - IPv6: 84 up to 1596 Byte (1 Port: 10232) Tests: Throughput, Latency, Frame Loss - Data Rate, Duration, Limits Configurable Layer Configurable (L1 to L3): see Traffic Generator - Maximum Data Rate: up to 10 Gbit/s 	<ul style="list-style-type: none"> Display Pause Frames, Connection/Test Status, Duration Cur. Tx Frame Size [Byte], Current Tx Rate/Second [Mbit/s] Graphic Display of All Results: - Throughput: Target/Actual Comparison [%], Tx Frame/s, Throughput Rate [%] - Latency: Latency Rate [Mbit/s], Latency/Frame Size [ms] - Frame Loss: Frame Loss Rate [%], Frame Transmission Rate [%] and many more
Y.1564 specification	<ul style="list-style-type: none"> Net frame size adjustable: - IPv4: 64 up to 1596 byte (1-Port: 10232) - IPv6: 84 up to 1596 byte (1-Port: 10232) Tests: CIR, EIR, Traffic Policing, Service Performance Layer selectable Maximum data rate: up to 10 Gbit/s Services: up to 8 	<ul style="list-style-type: none"> Display: IR (min, mean, max), FTD, FDV Tabular display of all results - CIR: IR, FTD, FDV, FLR - EIR: IR, FTD, FDV, FLR - Traffic Policing: IR, FTD, FDV, FLR - Service Performance: IR, FTD, FDV, FLR, Availability

Specifications ISDN and POTS:

General:	Applications, Settings + Results:	
BRI S Interface ITU-T I.430 BRI S Terminal BRI S Telephone BRI S TE Simulation	<ul style="list-style-type: none"> BRI S TE Mode, Terminal device simulation L2 Mode: P-P, P-MP Test Availability of B Channels BRI S Level and Voltage Evaluation Protocol: DSS1 Display L1, L2 and L3 of B Channel Status 	<ul style="list-style-type: none"> incoming /outgoing Call Display of Call Parameters own Acoustics Connection: Call (Single/Block Dial) configurable services: - Language, Fax G3/G4, Audio, Telephony, Mixed etc.
PRI interface ITU-T I.431, ETS 300 011 ITU-T G.703, HDB3-Code PRI S Terminal PRI S Telephone PRI TE Simulation	<ul style="list-style-type: none"> PRI S TE Mode, Terminal device simulation L2 Mode: P-P, P-MP Test Availability of B Channels PRI S Level and Voltage Evaluation Protocol: DSS1 Display L1, L2 and L3 of B Channel Status incoming /outgoing Call 	<ul style="list-style-type: none"> Display of Call Parameters own Acoustics Connection: Call (Single/Block Dial) configurable services: - Language, Fax G3/G4, Audio, Telephony, Mixed etc. Additional Functions/Settings: L1 Alarms: CRC-4, AIS, FAS, E-Bit, A-Bit, Sax
POTS Tester Analogue Tester POTS Butt Set POTS Terminal Simulation POTS Monitor	<ul style="list-style-type: none"> Fully-fledged POTS Butt Set, POTS Phone POTS Terminal Equipment (TE) Analogue Phone with DTMF + Pulse Dial Incl. Fully-fledged Analogue Acoustics High-impedance Listening on POTS Configurable DTMF Signal Level 	<ul style="list-style-type: none"> Voltage Measurement + Display Polarity when Hook-on and Hook-off CLIP + Caller-ID according to ETS 300 659/778 Supports FSK + Display of Caller ID FLASH Function (40 up to 1000 ms)

Data sheet: Technical data subject to change without notice

Specifications Cable multimeter:

General:			
	Measuring Range	Resolution	Accuracy
DC Voltage; UDC (U =):	<ul style="list-style-type: none"> 0 V to 9.99 V 10 V to 200 V 	<ul style="list-style-type: none"> 0.01 V 0.1 V 	<ul style="list-style-type: none"> ± (0.5 % + 2 digits) ± (0.5 % + 2 digits)
AC Voltage; UAC (U ~):	<ul style="list-style-type: none"> 0 V to 9.99 V 10 V to 200 V <p>Frequency: 10 Hz to 200 Hz; 0.2 Hz; ±(1.5 % + 2 digits), sinus</p>	<ul style="list-style-type: none"> 0.01 V 0.1 V 	<ul style="list-style-type: none"> ± (2 % + 2 digits) ± (1.5 % + 2 digits)
Capacitive Symmetry Balance; CSym:	<ul style="list-style-type: none"> 10 nF to 4 µF <p>Dielectric strength for external voltage up to 17 V DC or 17 V AC (with a load 200 kΩ)</p>	<ul style="list-style-type: none"> 0.01 nF 	<ul style="list-style-type: none"> 0.1 % of the capacity against ground
Capacitance; C:	<ul style="list-style-type: none"> 0.01 nF to 9.99 nF 10 nF to 99.99 nF 100 nF to 999.9 nF 1 µF to 8 µF <p>Dielectric strength for external voltage up to 17 V DC or 17 V AC (with a load 200 kΩ). Measured by film capacitors</p>	<ul style="list-style-type: none"> 0.01 nF 0.01 nF 0.1 nF 1 nF 	<ul style="list-style-type: none"> ± (4 % + 4 digits) ± (4 % + 4 digits) ± (3 % + 1 digit) ± (3 % + 1 digit)
Isolation Resistance; Iso: (105 V, max. 2 mA)	<ul style="list-style-type: none"> 0.1 kΩ to 99.9 kΩ 100 kΩ to 999 kΩ 1 MΩ to 9.99 MΩ 10 MΩ to 99.9 MΩ 100 MΩ to 1 GΩ <p>Dielectric strength for external voltage up to 5 V DC or 30 V AC (with a load 200 kΩ)</p>	<ul style="list-style-type: none"> 0.1 kΩ 1 kΩ 10 kΩ 100 kΩ 100 kΩ 	<ul style="list-style-type: none"> ± (2 % + 1 digit) ± (2 % + 1 digit) ± (2 % + 1 digit) ± (5 % + 1 digit) ± (5 % + 1 digit)
Isolation Resistance; Iso: (8 V, max. 8 mA)	<ul style="list-style-type: none"> 0.1 kΩ to 99.9 kΩ 100 kΩ to 999 kΩ 1 MΩ to 9.99 MΩ 10 MΩ to 40 MΩ <p>Dielectric strength for external voltage up to 5 V DC or 30 V AC (with a load 200 kΩ)</p>	<ul style="list-style-type: none"> 0.1 kΩ 1 kΩ 10 kΩ 100 kΩ 	<ul style="list-style-type: none"> ± (2 % + 1 digit) ± (2 % + 1 digit) ± (2 % + 1 digit) ± (5 % + 1 digit)
Resistive Symmetry Balance; RSym:	<ul style="list-style-type: none"> 10 Ω to 5 kΩ <p>Dielectric strength for external voltage up to 30 V DC or 30 V AC (with a load 200 kΩ)</p>	<ul style="list-style-type: none"> 0.1 Ω 	<ul style="list-style-type: none"> 0.2 % of Rs ± 0.2 Ω
Loop Resistance; R: (13 V, max. 15 mA)	<ul style="list-style-type: none"> 1 Ω to 999.9 Ω 1 kΩ to 9.999 kΩ 10 kΩ to 99.99 kΩ 100 kΩ to 999.9 kΩ 1 MΩ to 9,999 MΩ 10 MΩ to 4.0 MΩ 	<ul style="list-style-type: none"> 0.1 Ω 1 Ω 10 Ω 100 Ω 1 kΩ 10 kΩ 	<ul style="list-style-type: none"> ± (1 % + 3 digits) ± (1 % + 1 digit) ± (1 % + 1 digit) ± (1 % + 1 digit) ± (2 % + 1 digit) ± (5 % + 1 digit)
DC Current; IDC (I =):	<ul style="list-style-type: none"> 0 mA to 150 mA 	<ul style="list-style-type: none"> 0.1 mA 	<ul style="list-style-type: none"> ± (2.5 % + 3 digits)
Unbalance @1 MHz; LCL:	<ul style="list-style-type: none"> 0 dB to 55 dB 55.1 dB to 65 dB <p>The length of the test leads can influence the accuracy of the measurement. Dielectric strength for external voltage up to 3 V DC or 3 V AC. At an internal resistance of the source of 1 MΩ it will be measured up to 3.5 V DC / AC.</p>	<ul style="list-style-type: none"> 0.1 dB 0.1 dB 	<ul style="list-style-type: none"> ± 1.5 dB ± 3 dB
NEXT @1 MHz; NEXT:	<ul style="list-style-type: none"> 0 dB to 65 dB <p>Dielectric strength for external voltage up to 3 V DC or 3 V AC. At an internal resistance of the source of 1 MΩ it will be measured up to 3.5 V DC / AC.</p>	<ul style="list-style-type: none"> 0.1 dB 	<ul style="list-style-type: none"> ± 1dB
RFL Resistive Fault Location	<ul style="list-style-type: none"> Display of: <ul style="list-style-type: none"> - Resistance to error (R_x), distance to error - Resistance from fault to short-circuit (R_y) - Loop resistance (R_s), cable length - Fault resistance (R_{fault}) 	<ul style="list-style-type: none"> Measuring ranges: <ul style="list-style-type: none"> - Loop resistance (R_s): 10..9999 Ω - Fault resistance (R_{fault}): 0..20 MΩ 	<ul style="list-style-type: none"> Accuracy R_x at L_x/L = 0.1 <ul style="list-style-type: none"> - R_s = 2000 Ω: ± 0.3 % ± 0.05 Ω - R_s = 200 Ω: ± 1.0 % ± 0.06 Ω
Remote Kit Control:	<ul style="list-style-type: none"> Use ARGUS to control different Remote Kits to switch the Line on the remote side, e.g. TX916 <ul style="list-style-type: none"> - Short-circuit - Exchange connect 	<ul style="list-style-type: none"> <ul style="list-style-type: none"> - Open circuit - Loop 	<ul style="list-style-type: none"> <ul style="list-style-type: none"> - Tone mode - switch 2 ports simultaneously
Other Functions:	<ul style="list-style-type: none"> Autotest 	<ul style="list-style-type: none"> Fast cable check 	<ul style="list-style-type: none"> Signature detection (e. g. PPA)
Reference Conditions (calibration):	<ul style="list-style-type: none"> Temperature: 23 °C ± 5 °C Relative humidity: 50 % ± 20 % relative humidity, non-condensing 		<ul style="list-style-type: none"> Frequency of measurement type: 50 Hz ± 5 Hz, sinus

Data sheet: Technical data subject to change without notice

Specifications Copper Tests (Oscilloscope):

General:	Applications, Settings + Results:	
TDR Test Time Domain Reflectometer	<ul style="list-style-type: none"> • Determination of the Loop Length • For Identification and Detection of Shorts, Opens, Impedance Mismatch, Bridged Taps/Stubs, Moisture, Loading Coils, Loose Contacts and more • Pre-configured List of Cable Types, Velocity of Propagation (VoP): 30 % (45 m/μs) up to 99.9 % (149.7 m/μs), Line Resistance, Mutual Capacitance • Graphical Display of Reflection Course 	<ul style="list-style-type: none"> • Measurement Range: 3.5 up to 6000 m • Res.: 0.025 % of Measurement Range; Accuracy: ±2 % • Configurable gain: -26 dB up to +44 dB • Config. Pulse: 5 ns up to 3.2 μs, Pulse Height: 5 V and 20 V • Dynamic range: 60 dB / Amplification Level • Zoom + Cursor for a Detailed Analysis • Save + Set of Reference Curve • Start/Stop Function (Realtime Mode)
Line Scope DSL Spectrum Analysis DSL Oscilloscope RF Current Clamp	<ul style="list-style-type: none"> • Monitoring in Time/Frequency Domain on all Types of Lines for Telecommunications and on active Lines with up to 200 VDC and 40 Vpp • Modem Finder, via Handshake Tones • Frequency Range: 20 kHz up to 35 MHz • Resolution: 67 Hz up to 8.625 kHz or 0.025 % of Measurement Range, Accuracy: ±2 dB • High-impedance or Line Termination: <ul style="list-style-type: none"> - Input Impedance: 3.6 kΩ, <10 pF - Switchable 100 Ω Input Resistance • Config. Gain FFT: -26 dB up to +20dB 	<ul style="list-style-type: none"> • For Identification and Detection of different Access Types • Graphical Display of FFT [dBm/Hz] and of Time (Oscilloscope) • Config. X-Axis: FFT or Time [μs] • Autom. Trigger in Time Domain • Zoom + Cursor for a Detailed Analysis • Save + Set of Reference Curve • Start/Stop and Peak Hold Function) • Peak Hold Function (Min/Max Trailing) • Symmetry Toggling • Detection of Disturbances/Disturbing Signals

Data sheet: Technical data subject to change without notice

Device Specifications

Technical Features:	
• Power supply	Li-ion battery pack or mains adaptor
• Hotkey	Quick start of various tests
• Power management	User configurable
• Keypad	18 keys, 4 cursor keys, 4 context-sensitive softkeys
• TFT colour display	800 x 480 pixels, backlit, incl. touchscreen
• 6 LEDs	Indicating the status + Ethernet port LEDs
• Handset	Integrated earpiece and microphone
• ARGUSpedia	Integrated help function
• CE marking	Complies with CE directives
• User safety	Fulfills EN 62368-1
• RoHS conformance	Conformance according to WEEE directive

Interfaces:	
• 1x RJ-45, 1x RJ-11	For xDSL, G.fast, POTS, U, R and C Measurement
• 3x Ethernet (RJ-45 test ports)	10/100/1000 Base-T, 2.5 GBase-T, 10000 Base-T / 10 GigE
• 1x SFP port, 1x SFP+ port	1000 Base-SX/LX/ZX/BX, 2.5 GBase-X, 10 GBase-X
• USB interfaces	2x USB 2.0 host type A, 1x USB 2.0 client type micro B
• WLAN	IEEE802.11a/b/g/n/ac, ax detection

Environmental conditions:	
• Temperature range for charging battery pack	0 °C (+32 °F) up to +40 °C (+104 °F)
• Max. Operating temperature (endurance tests)	0 °C (+32 °F) up to +40 °C (+104 °F)
• Max. Operating temperature (in battery mode)	-10 °C (+14 °F) up to +50 °C (+122 °F)
• Operating temperature (with power/car adapter)	0 °C (+32 °F) up to +40 °C (+104 °F)
• Storing Temperature	-20 °C (-4 °F) up to +60 °C (+140 °F)
• Relative humidity	Up to 95 %, non-condensing

Dimensions:	
• Size	H x W x D: 300 x 128 x 94 mm (11.81 x 5.04 x 3.70 in)
• Weight	approx. <2000 g (4.41 lbs, ARGUS incl. battery pack)

Documentation and Analysis

- **Documentation** of all parameters recorded to test reports (in device and on PC) via automatic access tests
- Transfer of test results via **QR code** to a smartphone or via WLAN, ETH or DSL to cloud (FTP server).
- Transfer of measurement results to the **ARGUS[®] Mobile App**
- Free of charge firmware updates via **cloud** or **ARGUS[®] update tool** (www.argus.info)
- **WLAN** for transf. test results to systems of an electronic order processing system, remote control via smartphone.

Data sheet: Technical data subject to change without notice

Standard Package:		
Basic device incl. Gigabit-Ethernet interface (10/100/1000 Base-T + SFP), Wi-Fi Management, IPv4/IPv6, IP+Download package (IP ping, traceroute test, HTTP/FTP download, FTP upload/server), Router Mode, Line scope, Web browser, Cloud services, SFP support, Lithium-Ion battery pack, Mains adaptor, Shock absorbing rubber jacket, Carrying case, appropriate cable set (depending on selected option, see below), Micro USB cable, Carrying strap, Hand strap and English manual		
Additional options:		
• xDSL Package incl. ADSL Annex A+L+M, VDSL2 up to Profile 35b	incl. 2 Wire Cable (020018)+xDSL Adaptor (000048)	Order number: 030005
• ADSL Annex B + J Enhancement	only as Enhancement for Art.No.: 030005	Order number: 030008
• VDSL2 Bonding Enhancement (up to Profile 35b)	requires Art.No.: 030045+030005, incl. Bonding Cable	Order number: 030050
• G.fast Enhancement (Profile 106a and 212a)		Order number: 030045
• SHDSL package (STU-R/C, 8 wire, EFM/ATM)	incl. 2/4/8 wire, SHDSL.bis, SHDSL w cable	Order number: 030020
• Time Domain Reflektometer (TDR)	up to 6 km	Order number: 030051
• Copper package (Cable multimeter/DMM)	incl. banana cable red/black + green	Order number: 030010
• Resistive Fault Location option (RFL)	requires Art.No.: 030010	Order number: 030055
• ARGUS® RF Current Clamp		Order number: 000265
• 2.5 Gigabit Ethernet Interface	via Ethernet (LAN1, SFP1)	Order number: 030035
• 10 GigE package (Loop, Traffic-Gen.)	incl. NBase-T/10 GBase-T (RJ45) (1/2.5/5/10 Gbit/s) incl. SFP+/10 GBas-T (1/10 Gbit/s)	Order number: 030030
• RFC 2544 option	requires Art.No.: 030030	Order number: 030033
• ARGUS® SAM/Service Activation Test (ITU-T Y.1564)	for up to 10 Gbase-T; requires Art.No.: 030030	Order number: 030057
• GPON option	incl. ARGUS® GPON ONT SFP, incl. SC/LC-APC patch cable	Order number: 030076
• GPON option, calibrated	incl. Art.No.: 030076 + initial calibration of the level measurement	Order number: 030077
• GPON Bridge/Router Option	requires Art.No.: 03076	Order number: 030087
• PON Installation Test	w/o stick, requires Art.No. 030077 or 030116 or 030100	Order number: 030097
• Optical Light Source (1310, 1490, 1550, 1625 nm)	external	Order number: 000280
• Optical Light Source (1310, 1550 nm)	external	Order number: 000297
• Optical Loss Test incl. 2λOLS	SW-Option Optical Loss Test & 2λOLS: 1310 & 1550 nm	Order number: 020061
• Optical Loss Test incl. 4λOLS	SW-Option Optical Loss Test & 4λOLS: 1310, 1490, 1550, 1625 nm	Order number: 020062
• Optical Loss Test incl. 2λOLS & OPM-Stick	incl. Optical Light Source 1310, 1550 nm	Order number: 020063
• Optical Loss Test incl. 4λOLS & OPM-Stick	incl. Optical Light Source 1310, 1490, 1550, 1625 nm	Order number: 020064
• Optical Power Meter option (OPM)	incl. ARGUS® Optical Power Meter (SFP), type 6006	Order number: 030080
• xPON OPM + PON ID for GPON/XGS-PON		Order number: 030100
• GPON-ONT for xPON-OPM	incl. GPON Transceiver SFP; requires Art. No. 030100	Order number: 030102
• XGS-PON-ONT for xPON-OPM	incl. XGS-PON Transceiver SFP; requires Art. No. 030100	Order number: 030103
• xPON-4xOPM	incl. Through Mode + Up-/Downstream level measurement	Order number: 030108
• xPON-5xOPM	incl. Through Mode + Up-/Downstream level measurement	Order number: 030104
• Speedtests up to 10 Gbit/s	via Ethernet (LAN4, SFP4), Wi-Fi + fiber via transceiver SFP; incl. ARGUS RealSpeed Direct (iperf), Ethernet Cat6 Patch Cable 1:1 (red)	Order number: 030106

Data sheet: Technical data subject to change without notice

• Speedtest up to 10 Gbit/s plus xPON-5xOPM	incl. ARGUS Real Speed Direct (iperf), Ethernet Cat6 Patch Cable 1:1 (red), SC/APC (8°) to LC/APC (8°) measurement cable & dust cap	Order number: 030107
• XGS-PON option	incl. ARGUS® XGS-PON ONT SFP + SC/LC-APC patch cable	Order number: 030115
• XGS-PON option, calibrated	incl. Art.No. 030115 + initial calibration of level measurement	Order number: 030116
• Optical Fault Finder option (OFF)	w/o OFF SFP (000275)	Order number: 030083
• OTDR package (1310 nm and 1650 nm)	incl. opt. adaptor + opt. measuring strip	Order number: 030040
• OTDR package (1310 nm and 1550 nm)	incl. opt. adaptor + opt. measuring strip	Order number: 030043
• OTDR leading fiber	1000 m, SC/APC-SC/APC	Order number: 030042
• Fiber Inspection option	w/o Fiber Inspection Tool	Order number: 030094
• Wi-Fi test interface	w/o Wi-Fi USB stick, see accessories price list*	Order number: 030059
• Wi-Fi7 module	requires Art.No.: 030059, 030054 and 030106 or 030107	Order number: 030120
• ARGUS® WLAN Analyzer	requires Art.No.: 030059	Order number: 030054
• ARGUS 2G4 Scope (2.4 GHz Spectrum Analysis)	incl. USB 2G4 Scope stick	Order number: 000240
• VoIP Option	incl. MOS value, Call generator, NT Sim., SIP trunk	Order number: 030060
• IPTV Option	incl. IPTV STB mode, IPTV passive, channel scan	Order number: 030065
• Triple Play package	incl. VoIP and IPTV option	Order number: 030067
• ARGUS® Real Speed Formal (RFC6349)	incl. ARGUS® Real Speed Direct (iperf)	Order number: 030056
• ARGUS® Real Speed Direct (iperf)	Client / Server	Order number: 030069
• ISDN BRI S/T TE interface	requires Art.No.: 030045	Order number: 030016
• ISDN PRI TE interface	requires Art.No.: 030020	Order number: 030022
• POTS option	POTS	Order number: 030070
<p>* We would be glad to provide further details and information about additional accessories on request. ** Technical details on request</p>		

