




### FBP7001 Desktop Power Meter

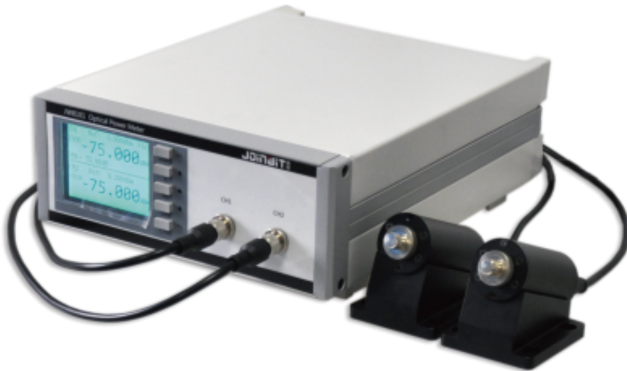

- Optical power meter can be configured for external probe or panel mounting
- Intelligent alarm and threshold allocation
- Buzzer alarm and font color alarm setting
- PDL function Test
- Spectroscopic ratio, additional loss, uniformity testing function
- English and Chinese configuration function
- Provide RS232 communication function, realize the power monitoring under no one guard, automatically store the data

Items	Specifications
Wavelength Range	850~1700nm
Probe Type	InGaAs
Detector Size	Φ2.0mm
Test Range	+5~-75dBm
Linearity	±0.04dB(+5~-50dBm)
	±0.08dB(-50~-60dBm)
Uncertainty	±3%
Display Resolution	0.1/0.01/0.001dB
Power Supply	AC 220 (50Hz)
Temperature	Working temp: -5~40℃, Storage temp: -25~70℃
Dimension/Weight	235×300×96mm/about 5kg

Let's go in the grandway!

