


電話線路分析儀

RECON™ Test Set The 21st Century Butt Set

市面上涵蓋功能最廣的電話線路分析儀，大且清楚的螢幕，搭配耐用、防潑水的堅固機身，是電話線路工程人員的隨身必備工具！

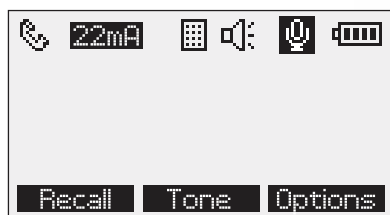

大且清楚的螢幕
29mm x 54mm




產品特性

- ・ 檢測未掛機狀態的電流與極性。
- ・ 檢測掛機狀態的電流與極性。
- ・ 鈴響震幅與頻率
- ・ 掛機與待接狀態之Caller ID資訊顯示
- ・ 放大線路監測與未掛機狀態的聲音大小比較
- ・ 可標籤儲存八組電話號碼
- ・ 電池電量提示
- ・ 連續性的極性狀態顯示
- ・ Caller ID/Call Waiting與Caller ID的故障偵測
- ・ 支援複頻（Tone）與脈衝（Pulse）撥號模式
- ・ 可設定各種模式自動關機
- ・ 偵測並辨別DSL與T1線路

數位防護

- ・ 自動偵測DSL與T1線路
- ・ Data Defender™ 在線線路防護科技
- ・ 線路電壓過高警示通知
- ・ 多種數據檢測選項
- ・ 主動監測用戶迴路最小負載
- ・ 監測模式的DTMF數位偵測與顯示
- ・ DigitView™ DTMF解碼用戶裝置撥號時的異常
- ・ PwrSave™ 裝置省電續航技術

裝置外觀

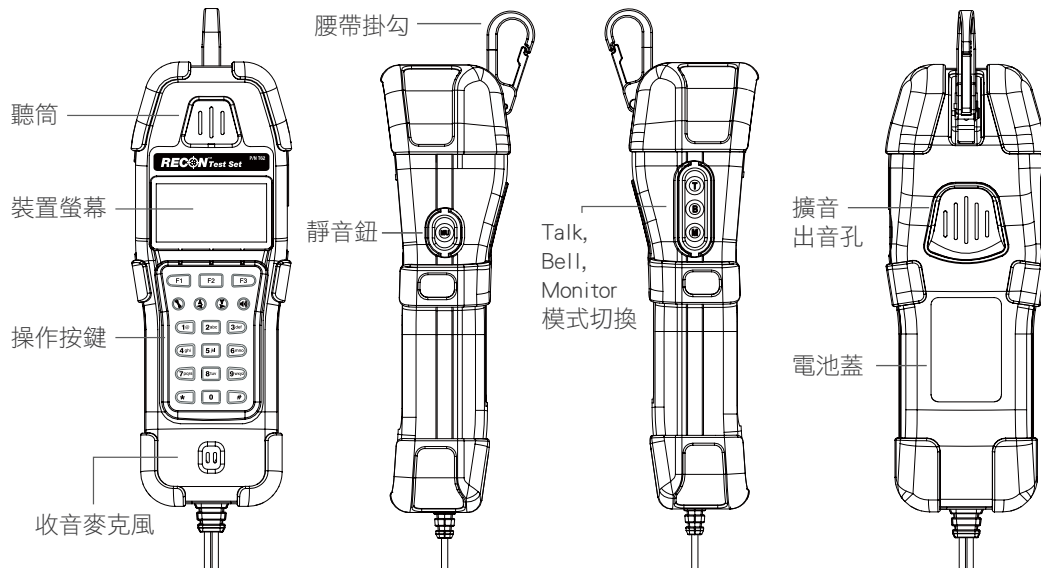

其他特色

- 進階數據偵測與辨識能力
- 背光LCD大螢幕，適用各種光線環境
- 特殊設計夜光按鍵，適用陰暗環境
- 100% 線路安全
- IP54等級，強效外來防護設計
- 六公尺高防摔認證
- 使用者導向擴音喇叭音量調整
- 聽筒音量調整設定
- 可主動隔離噪音關閉收音麥克風
- 單鍵快速控制收音麥克風開關
- 軟鍵按鈕選項清單
- 外加防護皮套，強化裝置環境適應力
- 背光亮度全段可調



產品規格

Ringer Equivalence	In BELL mode : 0.0 (no ringer load)
Pulse Dialing	Pulse rate : 10 pps $\pm 10\%$; Make / break ratio : 60% to 40% $\pm 2\%$; USA Interdigit interval : 820 ms ; Resistance during break : 120K Ohms minimum
Tone Dialing	DTMF output (into 600 Ohms) ; Tone - Frequency error $\pm 1.5\%$; Tone Level : High group : -6 ± 2 dBm ; Low group : -8 ± 2 dBm ; High group vs. Low group Difference (twist) : 2 ± 1 dBm
Flash Duration	600 ± 50 ms
Pause Duration	Tone : 3 seconds ; Pulse : 3.4 seconds
Memory	8 programmable locations, 32 digits with 12 character tag, stored in non-volatile memory. Last number redial plus list of last 10 numbers dialed.
Return Loss	Minimum 14 dB at 600 Ohms
Line-Current Range	10 to 110 mA
Apparent Line Resistance	270 Ohms at 20 mA
Monitor Mode Impedance	DC: 1M Ω typical AC: 390 K Ω at 1 KHz typical
Measurement	Voltage: 0 to 200 VDC $\pm 5\%$; Current: 10 to 110 mA $\pm 5\%$; NOTE : Do not attach test set to electric-power lines
User Controls	(1) Left-side-mounted TALK/BELL/MON push button switches for operating modes ; (1) Right-side-mounted microphone mute pushbutton ; (4) Front-mounted pushbuttons for various options ; (1) Standard front-mounted 12-key phone keypad
Interface	Attached cord set
Display	Transflective 128 by 64 pixel graphical liquid crystal display (LCD) with LED backlight
Size	21 x 6.4 x 5.1 cm without belt clip and cord set
Weight	511g
Power	4 x AAA alkaline batteries
Battery Life	With 100% backlight and in speaker mode - 20 hours Backlight off and speaker off - 75 hours Standby - 2 years
Warranty	1 Year

採購資訊



- Recon Test Set 主機
- 鱷魚夾與電話線跳線組
(免插拔)