

FTE-8200



- Fast Real Time with <1/2 second Update
 - Bar Graph, Table Displays & 6GHz Line Graph
 - Auto Test Zooms in on Active Channels
 - Rugged Case w/Impact Resistant Boot
 - Optional Auto Pass/Fail Video Inspection System
 - Solid State Optics-No Moving Parts
- Up To 98 Channels
 - 50 or 100 GHz
 - Pass/Fail Thresholds
 - User Setup Screen
 - 4" Touch Color Display
 - Impact Resistant Boot
 - Stores up to 1000 test
 - USB/PC Port

Hand-Held OSA

The FTE-8200 Optical Spectrum Analyzer is one of the most rugged and affordable full featured Mini OSAs on the market. This C-band Hand-Held OSA is available in up to 98 channels with 50 and 100 GHz channel spacing. The FTE-8200 is simple and fast to operate with its touch screen operation and twice a second scan. It offers high end features such as power tilt monitoring for DWDM channel equalization.

With a full set of selectable scale limits and thresholds, the FTE-8200 makes zeroing in on channel measurements easy. For flexibility the channel numbers are selected in wavelength or frequency. The information is displayed in graph, 6GHz line graph and table mode on the 4" bright auto rotating color touch screen. The FTE-8200 allows users to set pass/fail thresholds and can store up to 1000 tests that can be downloaded via the USB PC port. Documentation is fast and easy with the included Cert-Soft certification software. The onboard Help system assists new users in parameter setup and file manipulation.

The FTE-8200 offers an IEC61300-3-35 auto Pass/Fail video inspection feature for use with the optional VIS-300 Video Probe



Terahertz Technologies Inc.
169 Clear Rd., Oriskany NY 13424 Toll Free: 888-U.S.- OTDRS
Phone: 315-736-3642 Fax: 315-736-4078
sales@teratec.us www.teratec.us



Made In the USA

FTE-8200 Hand-Held OSA

FTE-8200 Specifications

Wavelength Range	Channels 14 - 62.5 196.25THz - 191.4THz 1527.6 -1566.31nm
Channel Spacing	50GHz, 100GHz
Wavelength Accuracy	±0.1nm
Channel Power Range	+10dBm to -50dBm
Absolute Accuracy	±1 dB
Max Composite Power	+28 dBm
PDL	±0.15dB
Optical Rejection Ratio	40dBc (@50GHz)
Measurement Time	< 1/2 Second
Readout Resolution	0.01dB
Return Loss	>40dB

General


Optical Interface	Universal FC/SC UPC** (Optional APC)
Graphical Display	Bar graph, 6GHz line graph and table view
Display	4 in. touch color TFT
Dimensions	6.25" L x 4.125" W x 1.875" H (159mm L x 105mm W x 48mm H)
Weight	1.5 lbs (0.7 kg)
Battery	Li-ion 6hr typ.
Power	USB 5V, 1A
Operating Temperature	-10°C to 40°C
Storage Temperature	-20°C to 60°C
Accessories Included	5V,1A USB Wall Charge with USB cable, Interchangeable FC and SC adapters , 2 stylus, CertSoft Software Suite, manual and rubber boot

** If the ordered part number contains a specified connector style, the FTE-8100 will be built with a fixed connector of choice. (not interchangeable)


TTI reserves the right to change specifications without notice.

Ordering Information

FTE-8200-C	C Band Hand Held Optical Spectrum/Channel Analyzer
FTE-8200-VP	Video Inspections System Option with Probe

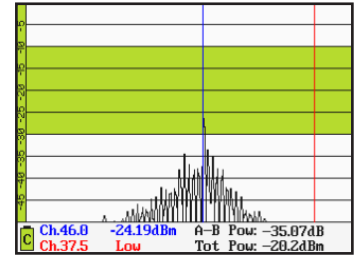


6GHz Line Graph



Graphical View



Table View

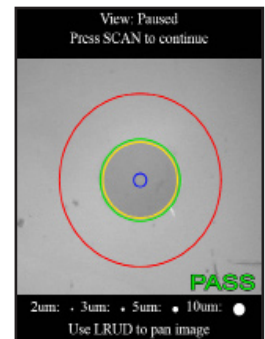

IEC61300-3-35 Auto Pass/Fail Video System



崑崙有限公司

802626 高雄市苓雅區新光路38號5樓之1
電話：07-5368282 傳真：07-5368272

WEWANT Co., Ltd.

5F.-1, No.38, Xinguang Rd., Lingya Dist.,
Kaohsiung City 802, Taiwan (R.O.C.)
TEL: +886-7-5368282 FAX: +886-7-5368272

