


VIAVI

CleanBlast System – Benchtop

Advanced fiber optic connector end-face cleaning system

The patented VIAVI Solutions® CleanBlast fiber end-face cleaning system provides a fast, effective, and cost-efficient solution for removing dirt and debris from connectors in most common applications. CleanBlast is a non-contact system that uses a highly filtered stream of pressurized gas with a vacuum circuit to create a high flow rate jet across the surface of the fiber. A 30 µl cleaning solvent is injected into the airflow, and the contamination from the end face along with the solvent are then removed through the retrieval circuit. The precise, highly-efficient non-contact air-solvent-air stream blasts and removes contamination with nearly 100% effectiveness.

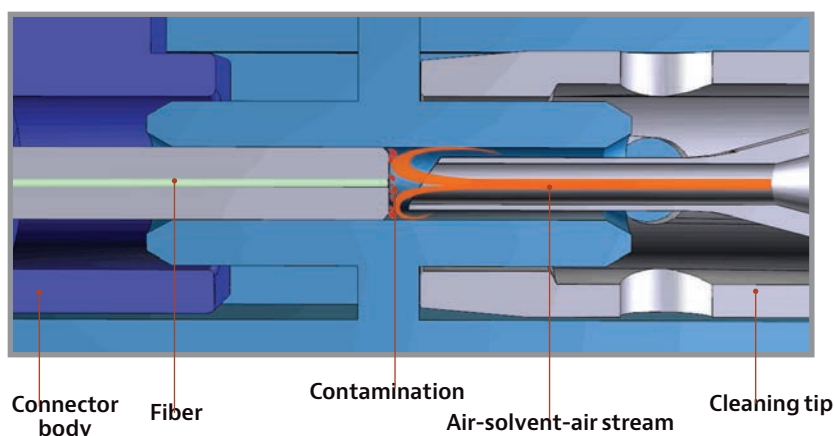

Key Benefits

- Provides rapid, controlled, and repeatable cleaning and removal of contamination from fiber end faces
- Eliminates user sensitivity and error
- Removes, rather than spreads or smears, loose debris from fiber end faces with a push of a button

Key Features

- Uses a precise non-contact air-solvent-air mixture/sequence to blast and remove contamination particles
- Offers a comprehensive selection of precision cleaning tips and adapters
- Input for FBP probe microscope and LCD display for fiber inspection capability

Applications

- Clean various types of both male (patch cord) and female (bulkhead) connector ends, including SC, FC, LC, ST, E2000, MPO, MTP®, MPX, MT, and SMA
- Quickly and easily remove contamination, dust, lint, oil, and other forms of debris from fiber optic end faces
- Clean multiple configurations and connector types with interchangeable, precision cleaning tips and adapters


Overview

VIAVI benchtop CleanBlast systems include a base unit and a handset connected to a 5 ft umbilical for reaching various application areas. Precision cleaning tips are available for both male (patch cord) and female (bulkhead) connectors for various connector types including SC, LC, FC, ST, E2000, MPO, MPX, MT, and SMA. All models include an input port for a separate probe microscope for fiber inspection capabilities and a video output for connecting to an external monitor or to a mounted LCD.

The system's cleaning solvent reservoir holds enough solution for at least 8,000 cleaning cycles. The solvent refill process is simple and spill-resistant. A built-in safety feature prevents the handset from accidentally triggering the system. It also monitors solvent levels and the safety switch, and features a series of LEDs to indicate system status.

FCLT Cleaning Tips


VIAVI offers a complete selection of precision cleaning tips and adapters for every connector and application including SC, FC, ST, LC, MU, E2000, and MPO/MTP connectors.

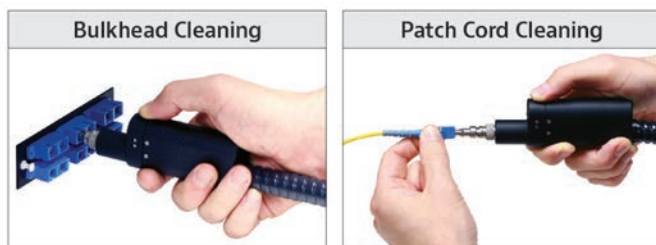


CleanBlast vs. Traditional Swab/Stick

	Before	Clean	After
CleanBlast			
Swab/Stick			

Components and Functions

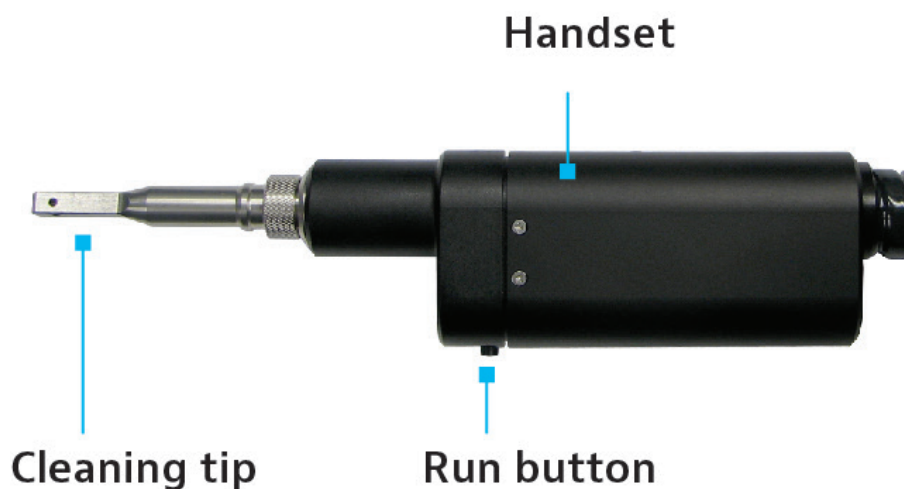

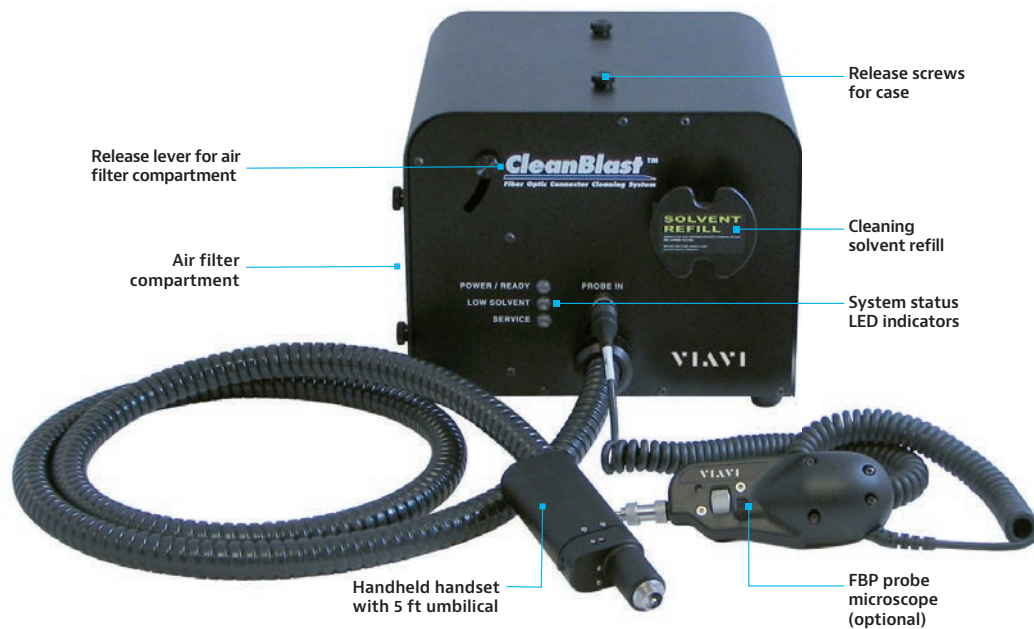

Specifications

Parameter	Description
<i>CleanBlast—Benchtop</i>	
Dimensions	40 x 33 x 18 cm (16 x 13 x 7 in)
Weight	9.5 kg (21 lb)
Power requirements	100 – 240 V AC, 2 A
Air source	External or nitrogen, regulated output 40 psi
Solvent consumption	At least 8,000 cleaning cycles per refill
Maintenance	100,000 cycles per air filter change, 2 x 0.01 micron air filters required
Video output	NTSC (BNC) or DIN connector to optional LCD
Cleaning cycle time	1 sec

Ordering Information

Description		Part Number
CleanBlast–benchtop with 5 ft umbilical bulkhead handset; universal 2.5 mm cleaning tip		FCL-B1000
CleanBlast–benchtop with 5 ft umbilical bulkhead handset; universal 2.5 mm cleaning tip; EU power supply		FCL-B1000-EU
CleanBlast–benchtop with 5 ft umbilical bulkhead handset; universal 2.5 mm cleaning tip; UK power supply		FCL-B1000-UK
CleanBlast–benchtop with 5 ft umbilical 90-degree bulkhead handset; universal 2.5 mm cleaning tip		FCL-B2000
Cleaning tips*	Universal 2.5 mm bulkhead (for CleanBlast)	FCLT-U25
	Universal 2.5 mm patch cord mating adapter	FCLT-U25MA
	Universal 1.25 mm bulkhead (for CleanBlast)	FCLT-U12
	Universal 1.25 mm patch cord mating adapter	FCLT-U12MA
	MTP/MPO bulkhead (for CleanBlast)	FCLT-MTP
	MTP patch cord mating adapter	FCLT-MTP-MA
Replacement parts	Internal air filter; 0.01U 0.125 inch NPTF	FCLP-FA-F1
	Bottle cap refill assembly	FCLP-RCA-1
	CleanBlast solvent refill, single bottle, 225 ml	FCLP-SOL1
	CleanBlast solvent refill, 6-pack, 225 ml	FCLP-SOL1-6
	LCD video display with mounting bracket and base	VM-LCD-6

* VIAVI has over 300 tips, patch cords, and adapters available for inspecting and cleaning different fiber optic connectors for a variety of different applications. This is not an all-inclusive list, but solutions for the most common connectors and applications. Please contact VIAVI for more information.



歲望有限公司

802626 高雄市苓雅區新光路38號5樓之1
電話：07-5368282 傳真：07-5368272

WEWANT Co., Ltd.

5F.-1, No.38, Xinguang Rd., Lingya Dist.,
Kaohsiung City 802, Taiwan (R.O.C.)
TEL: +886-7-5368282 FAX: +886-7-5368272

